



# *Elegance* RAINGUTTERS

an *OAliaxis* company

\*\*\*  
**LEAD-FREE**  
PIPE SYSTEMS

SUITABLE FOR BUILDINGS  
AND HOUSES



# CONTENTS



## *Elegance* -FEATURES & ADVANTAGES

# 2

- 2 Features & Application
- 3 Elegance Advantage

## ACCREDITATION & STANDARDS

# 6

- 6 Quality & Certification
- 7 Standards & Qualification

## *Elegance* - PRODUCT DETAIL

# 7

- 7 Raingutter & Fittings
- 13 Rainwater Pipes
- 14 Paling Solvent Cement

## INSTALLATION

# 18

- 18 Installation Guidelines
- 26 Project References

## ABOUT US

# 27

- 27 About Paling Industries
- 27 About Aliaxis



## PRODUCT RANGE

## RAINGUTTERS

## FEATURES

- An exclusive layout, with internal brackets and outlets that can be placed anywhere along the length of the gutter, avoiding the need to break the running length for the downpipe.
- Superior outlook
- Certified BS EN 607 and BS EN 1462



## ADVANTAGES

- Corrosion and UV Resistant
- Durable and Lightweight
- High Flow Capacity with 16,100 mm<sup>2</sup>
- No Over Flow
- Anti-Dripping System to Prevent Leak
- Weir Outlet to Induce Higher Flowrate
- Designed to accommodate extensive thermal movement



## APPLICATION

Paling Raingutter Systems are recommended for building applications, and are specifically designed for contemporary houses and condominiums.

## Stylish Design

The unique design of the Paling's *Elegance* Rainwater Gutter System is able to complement any contemporary lifestyle to date. With this exclusive layout, the internal brackets and outlets can be placed anywhere along the length of the gutter without the need to break the running length to accommodate the down-pipe.

A comprehensive range of Paling's *Elegance* and accessories are manufactured to the same high standards. Paling's *Elegance* range is designed to suit wide application and with its aesthetically superior outlook, most buildings can benefit from it.

# *Elegance*

## Rainwater Gutter System



### Performance Characteristics

PVC-U is a corrosion free material. It can withstand tough weather conditions for an extensive period of time. It is UV resistant even though exposed to direct sunlight. It is also extremely durable, light weight and easy-to-install.

PVC-U is maintenance free. Its smooth surface prevents algae and fungus growth. Together, these innovative features improve the building's outlook, reduce assembly and installation time, reduce percentage of failure and help save up a considerable amount of money.

As a result, this system offers easier and faster assembly, a design that last much longer than any typical rainwater gutter system.

### Efficiency

Paling's *Elegance* Gutter Profile has a high capacity with an effective cross sectional area of 16100mm<sup>2</sup>. It prevents over flow and keeps the house clean and dry.

The expansion outlet has high flow capacity and anti dripping feature. No rubber gasket and solvent cement is required. In addition, advance design at joints prevents leakage.

Paling's *Elegance* complies with the Standard BSSEN607 for gutter profile and fittings and Standard BSEN1462 for the gutter brackets.



### PALING GUTTER PROFILE

- ① More flexibility with P-Shape front return
- ② Grooved profile to enable horizontal movement after locking into internal bracket
- ③ Higher capacity 16 100mm<sup>2</sup>



### EXPANSION OUTLET

- ① Weir flow, draining up to 6L/S to 10L/S
- ② No leaking with anti dripping baffle
- ③ Suitable for round and rectangular



### PALING INTERNAL BRACKET

- 1 Allowing horizontal movement with P.Shape
- 2 Can load up to 60kg each
- 3 Aesthetically superior outlook



### PALING EXPANSION JOINER

- 1 Accommodates thermal movement from -10°C -40°C
- 2 2 in 1 (Joiner + expansion)
- 3 Double rubber seals to prevent leakages



## QUALITY & CERTIFICATION



## SYSTEM CERTIFICATION

### RAINWATER GUTTER

1. Unplasticized Polyvinyl Chloride (PVC-U)  
Rainwater Gutter

### RAINWATER DOWNPIPES

1. Unplasticised Polyvinyl Chloride (PVC-U)  
Rainwater downpipes round and rectangular shape

### RAINWATER GUTTER FITTINGS

1. Unplasticised Polyvinyl Chloride (PVC-U)  
fittings for Rainwater Gutter and downpipes



## STANDARDS AND QUALIFICATION

- 1 BSEN 607 for gutter profile and fittings
- 2 BSEN 1462 for gutter bracket




### GUTTER PROFILE PRINTING

- A The word 'Paling' or Paling logo
- B The word 'ELEGANCE'
- C The word SIRIM CERTIFIED or MS logo
- D SIRIM license number
- E Standard conformance and year of standard
- F Manufacturing date
- G Manufacturing shift code

### GUTTER FITTINGS MARKING

- H Product name
- I Paling logo
- J Production date

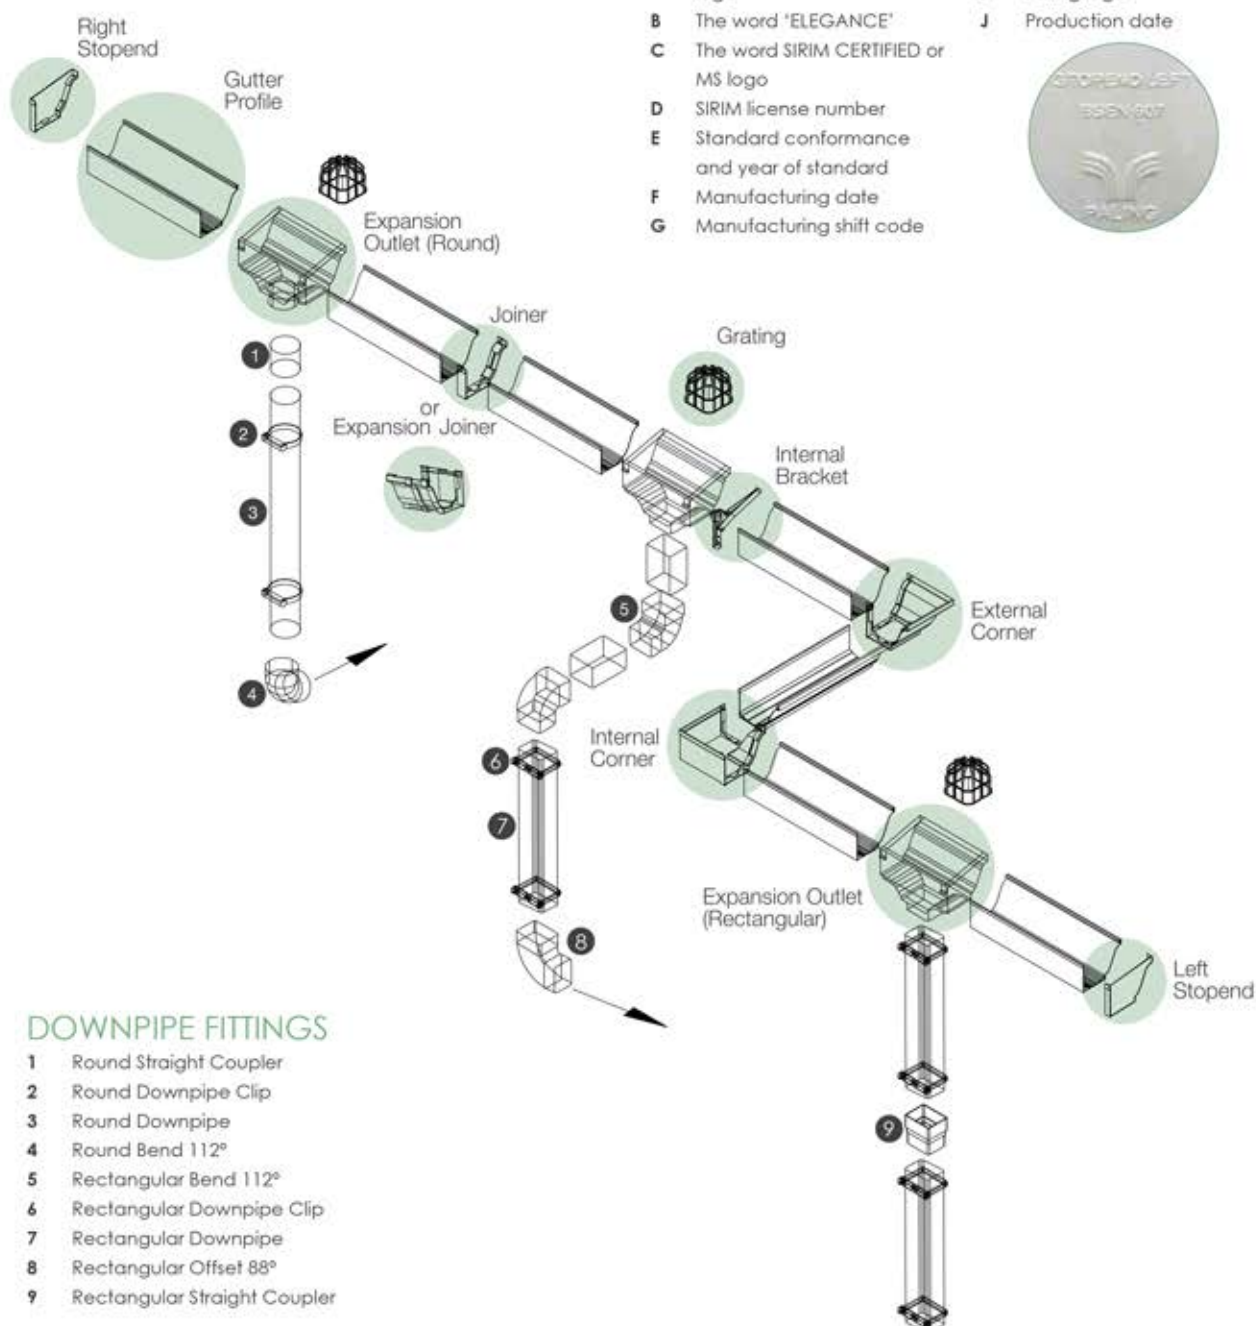

### DOWNPIPE FITTINGS


- 1 Round Straight Coupler
- 2 Round Downpipe Clip
- 3 Round Downpipe
- 4 Round Bend 112°
- 5 Rectangular Bend 112°
- 6 Rectangular Downpipe Clip
- 7 Rectangular Downpipe
- 8 Rectangular Offset 88°
- 9 Rectangular Straight Coupler

## GUTTER PROFILE




CODE NO.		DIMENSIONS (mm)			LENGTH (m)
MILKY WHITE	TRENDY GREY	A	B	C	
1500 205 58 01	1500 205 58 22	205	125	424	5.8

## EXPANSION OUTLET




CODE NO.		OUTLET SIZE (mm)	SHAPE	DIMENSIONS (mm)	
MILKY WHITE	TRENDY GREY			A	B
2710 110 01	2710 110 22	110	ROUND	341	238
2710 115 01	2710 115 22	110	RECTANGULAR	341	238

## STOP END




CODE NO.		DIRECTION
MILKY WHITE	TRENDY GREY	
2705 205 LE 01	2705 205 LE 22	LEFT
2705 205 RI 01	2705 205 RI 22	RIGHT

## INTERNAL CORNER




CODE NO.		DIMENSIONS (mm)	
MILKY WHITE	TRENDY GREY	A	B
2703 205 01	2703 205 22	227	227

**EXTERNAL CORNER**


CODE NO.		DIMENSIONS (mm)	
MILKY WHITE	TRENDY GREY	A	B
2702 205 01	2702 205 22	227	227

**EXPANSION JOINER**

CODE NO.	
MILKY WHITE	TRENDY GREY
2709 205 01	2709 205 22

**JOINER**

CODE NO.	
MILKY WHITE	TRENDY GREY
2706 205 01	2706 205 22


**INTERNAL BRACKET**

CODE NO.	
MILKY WHITE	TRENDY GREY
2707 205 01	2707 205 22


## GRATING



CODE NO.	
MILKY WHITE	TRENDY GREY
2708 205 01	2708 205 22

STRAIGHT  
COUPLER (Rectangular)

CODE NO.	DIMENSIONS (mm)				
	L	L1	L2	D	D1
2714 115 01	52	50	122	115	90


68° BEND  
(Rectangular)

CODE NO.	ANGLE	DIMENSIONS (mm)			
	θ	L	L1	D	D1
2713 115 01	68°	52	50	115	90



**88° BEND**


(Rectangular)



CODE NO.	ANGLE		DIMENSIONS (mm)			
	$\theta$	L	L1	D	D1	
2711 115 01	88°	52	50	115	90	

**OFFSET 88°**


(Rectangular)



CODE NO.	ANGLE		DIMENSIONS (mm)			
	$\theta$	L	L1	D	D1	
2712 115 01	88°	52	50	115	90	

**DOWNPIPE CLIP**


(Rectangular)



CODE NO.	DIMENSIONS (mm)	
	D	D1
2704 115 01	115	90


## DOWNPIPE CLIP

(ROUND)



CODE NO.	DIMENSIONS (mm)
	D
2701 110 01	110

## RECTANGULAR DOWNPIPE

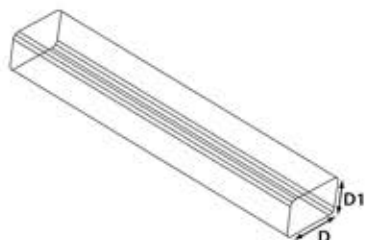


CODE NO.	LENGTH (m)	MIN. WALL THICKNESS e (mm)	DIMENSIONS (mm)	
			D	D1
1510 115 58 01	5.8	1.7	115	90

## RAINWATER PIPES

There are three types of rainwater pipe:

- The Normal Duty Pipe is intended for exposed installation on the building that do not exceed five storeys in height, such as terrace houses or low-rise shop-houses.
- The Medium Duty is intended for exposed installation on building exceeding five storeys
- The Heavy Duty designed with higher ring stiffness for use in pipe work to be encased in reinforced concrete (RC) columns.

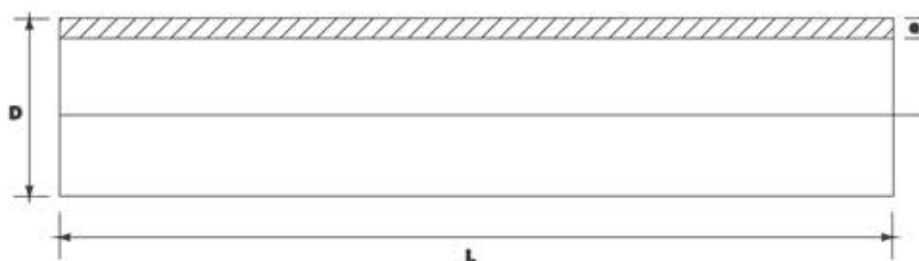

CODE NO.	MODEL	NOM. SIZE (mm)	SPECIFICATION	OUTSIDE DIAMETER D(mm)	WALL THICKNESS e (mm)	LENGTH L (m)
1220 110 58 ND 01	Normal Duty	110	BS 4576/ BS EN 12200	110.0-110.3	2.2-2.7	5.8
1220 110 58 MD 01	Medium Duty	110	BS EN 1329	110.0-110.3	3.2-3.8	5.8
1222 110 58 HD 20	Heavy Duty	110	BS EN 12200/ DIN 8061	110.0-110.3	6.0-6.8	5.8

## SOLVENT CEMENT

CODE NO.	DESCRIPTION	GIMS	TIN/ CARTON
60500 70P	Paling Clearsolve fast dry	500	20
60100 70	Paling Clearsolve fast dry	100	60
60500 10	Paling Coloursolve slow dry (Blue)	500	20
60500 12	Paling Clearsolve fast dry (Green)	500	20
60500 11	Elegance solvent cement (rain water gutter)	500	20







## PRODUCT RANGE

# SOLVENT CEMENT

## FEATURES

- PVC Solvent Cement Fast Dry – for pipes and fittings  $\leq 80\text{mm}$
- PVC Solvent Cement Slow Dry – for pipes and fittings  $\geq 80\text{mm}$
- Moderate solvent odour
- Complies with MS 628 or BS 4346; SPAN listed



## ADVANTAGES

- Colour Co-Polymer for Easier Application and Inspection
- Easy to Use
- Premium Quality
- Fast and Slow Drying Solvent available for Strong Bonding



## APPLICATION

Palling Solvent Cement is formulated for PVC pipes used for rainwater and raingutter applications.



## PALING COLOURSOLVE FAST DRY

**Solid Content: 24%**

**Consistency property: 1,000 pcs**

**Quality: Tough & Resilient**

**Solid consist of: MEK & CYC**

**Colour: Green**

**Standard: MS628 Part II Section 2.2**

- Highly soluble fast dry PVC-U Solvent cement.
- Suitable for joining all PVC-U pipes from 15mm - 75mm diameter.
- When applied, it will instantly dissolve and blend with the pipe to produce a film (wall) of 0.4mm thick, so that the fitting gap will be strong and stable.

### STRAINING TIME

Pipes with diameters 15mm	10 seconds
Pipes with diameters 25mm to 32mm	8 seconds
Pipes with diameters 50mm	6 seconds
Pipes with diameters 75mm	4 seconds

## PALING COLOURSOLVE SLOW DRY

**Solid Content: 24%**

**Consistency property: 1,000 pcs**

**Quality: Tough & Resilient**

**Solid consist of: MEK, CYC & THF**

**Colour: Blue**

**Standard: MS628 Part II Section 2.2**

- Highly soluble fast dry PVC-U Solvent cement.
- Suitable for joining all PVC-U pipes from 75mm - 200mm diameter.
- When applied, it will instantly dissolve and blend with the pipe to produce a film (wall) of 0.4mm thick, so that the fitting gap will be strong and stable.

### STRAINING TIME

Pipes with diameters 25mm	20 seconds
Pipes with diameters 32mm to 50mm	16 seconds
Pipes with diameters 75mm to 100mm	12 seconds
Pipes with diameters 150mm	8 seconds
Pipes with diameters 200mm	4 seconds

## PALING RAINGUTTERS SOLVENT CEMENT

**Solid Content: 24%**

**Consistency property: 1,000 pcs**

**Quality: Tough & Resilient**

**Solid consist of: MEK, CYC & THF**

**Colour: Transparent and Clear**

**Standard: MS628 Part II Section 2.2**

- Suitable for joining all PVC-U pipes rain gutter.
- When applied, it will instantly dissolve and blend with the pipe to produce a film (wall) of 0.4mm thick, so that the fitting gap will be strong and stable.

### STRAINING TIME

Gutter Profile	30 seconds
----------------	------------

## ATTENTION:

1. Temperature below 15°C (50°F) will extend the straining period for approximately 5 minutes for each type of pipe.
2. All the above solvent cement is not applicable to those PVC-U pipe or fitting which are made of partly recycled material.
3. After assembly, the pipe must be tightly held in place and shall only be released after recommended straining time as stipulated. If release prematurely, the pipe to be fitted will spring apart.

### PACKING

### CTN. SIZE

500g. (with brush) x 20 Tins per ctn.

508mm x 220mm x 225mm

## SOLVENT CEMENT REQUIREMENT FOR PVC-U PIPES & FITTINGS

NOMINAL SIZE OF PIPE OR FITTING (mm)	AMOUNT OF SOLVENT CEMENT REQUIRED PER JOINT (g)	NO OF POSSIBLE JOINTS	
		100 g	500 g
15	1.3	76	383
20	2.0	55	250
25	2.5	40	200
32	3.2	30	156
40	5.0	20	100
50	7.2	13	69
80	12.0	8	41
100	15.5	6	32
155	26.0	2	19
200	49.0	1	10

## SOLVENT CEMENT REQUIREMENT FOR PVC-U GUTTERS & COMPONENTS

SIZE (mm)	AMOUNT OF SOLVENT CEMENT REQUIRED PER JOINT (g)	NO OF POSSIBLE JOINTS (500 g)
205 x 125	15.5	32

### RECOMMENDATIONS ON BRUSH:

- A : Pipes with diameter 25mm and below - use brush as accompanied and affixed to can
- B : Pipes with diameter 32mm to 50mm and below - use 1" brush
- C : Pipes with diameter 75mm to 200mm and below - use 2" brush
- D : Rain Water Gutter and Components - use brush as accompanied and affixed to can

### PRESSURE TEST:

	TEST PRESSURE	DRYING TIME
Cold Water (20°C)	Below 12kg/cm <sup>2</sup> (171psi)	After 1 hour
Hot Water (60°C)	Below 12kg/cm <sup>2</sup> (171psi)	After 2 hours

## PHYSICAL AND CHEMICAL PROPERTIES

**Flash point:** 15°C

### Flammable Mixture (UN No. 1133)

This solvent cement material will ignite at ambient temperatures. Colourless vapours may travel considerable distance to ignition sources and cause flash fires or explosions.

### Hazard Identification

May cause eyes and skin irritation, burns or dermatitis.

### Storage

Store in well-ventilated area. Keep away from heat, sparks and flame.

### Safety Advice

- Keep out of reach of children.
- Keep away from sources of ignition - No Smoking
- Avoid contact with eyes.
- In case of fire, use chemical powder, foam or carbon dioxide.



## INSTALLATION GUIDES AND TIPS

THE FOLLOWING  
FACTS HAVE TO BE  
DETERMINED BEFORE THE  
INSTALLATION STARTS


The Effective roof area  
The number and position of outlets  
The angles and their distances from outlets  
Total number of brackets and fittings  
Low points of the installation  
(expansion outlet fixing point)  
High points of the installation

### The effective roof area

The Effective Roof Area (ERA) can be determined by using the following calculations:

Option **1** Simple Calculation Formula

$$[(H/2) + W] \times \text{Length of roof (L)} = \text{Area in m}^2$$

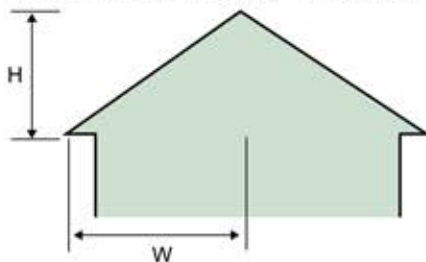

Referring to Example A (Calculation Sequence),


$$R1 : (4m + 2.3/2) \times 16m = 82.4^2$$

$$R2 : (4m + 2.3/2) \times 8m = 41.2^2$$

$$R3 : (4m + 2.3/2) \times 6m = 30.9^2$$

$$R4 : (4m + 2.3/2) \times 6m = 30.9^2$$

Note : H = 2.3

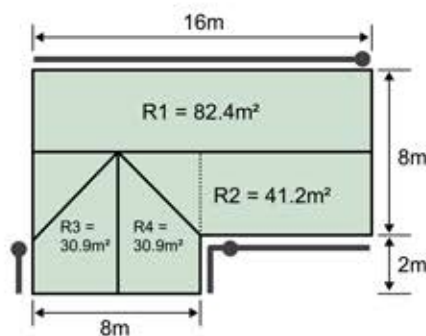

Example A

Using roof dimensions with a 30° roof pitch.

$$R1 : 4m \times 16m \times 1.288 = 82.4^2$$

$$R2 : 4m \times 16m \times 1.288 = 41.2^2$$

$$R3 : 4m \times 16m \times 1.288 = 30.9^2$$

$$R4 : 4m \times 16m \times 1.288 = 30.9^2$$

Note : ● Expansion Outlet — Gutter

Option **2** Multiplication Calculation Formula

$$\text{Wide (W)} \times L \times \text{Factor} = \text{Area in m}^2$$

The table below provides a wider range of factors to enable accurate assessment of effective roof area to be determined. The average ERA of 100m² requires at least one expansion outlet. Therefore 3 expansion outlets are needed for example A.

Roof pitch	Factor
10°	1.088
12.5°	1.111
15°	1.134
17.5°	1.158
20°	1.182
22.5°	1.207
25°	1.233
27°	1.260
30°	1.288
32.5°	1.319
35°	1.350
37.5°	1.384
40°	1.419
42.5°	1.459
45°	1.500
47.5°	1.547

For roofs of 50° and above, a factor of 1.600 may be used



## INSTALLATION GUIDES


It is Important to Read Entire Instructions Prior to Attempting any Installation!

To obtain the maximum benefits, it is essential that you have the right quantity of components and parts before assembling to save time and effort.



### Required Equipment

- |                                 |                                    |
|---------------------------------|------------------------------------|
| 1. Hammer                       | 18. Planks                         |
| 2. Hacksaw                      | 19. Measuring tape                 |
| 3. Power drill                  | 10. Pencil                         |
| 4. Cloth                        | 11. Graph paper                    |
| 5. String line                  | 12. Square and rule                |
| 6. Builders level or line level | 13. Screws                         |
| 7. Ladder                       | 14. <i>Elegance</i> Solvent Cement |

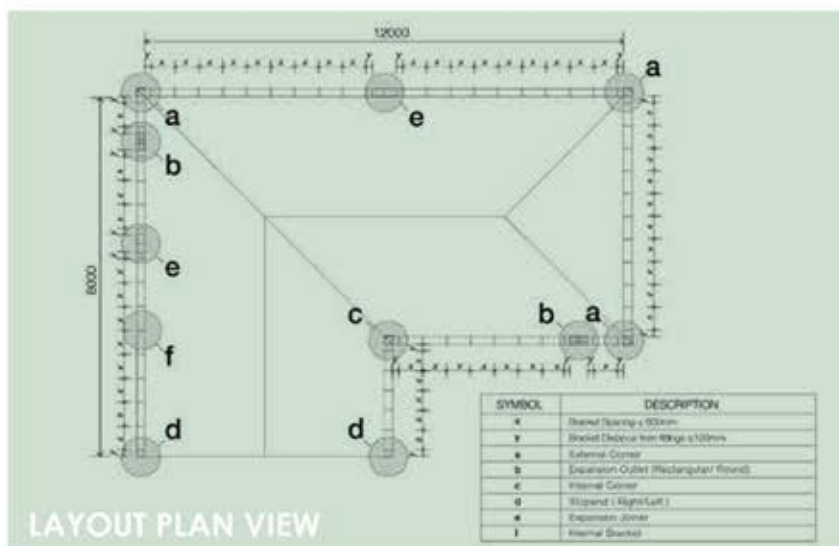

### STEP 1

Measure and use a planning guide to sketch a roof plan (1 centimetre = 1 metre). Determine the fittings required and transfer the information to the order sheet. This will enable you to calculate the cost of materials required to complete the installation. Also, decide where you want your downpipe. The effective roof area of 100m<sup>2</sup> required a minimum of one expansion outlet. Larger effective roof area will require more expansion outlets. PALING's *Elegance* is available in 4 metre and 6 metre lengths.




### STEP 2

Measure the roofline where the gutter will be installed, adding together the lengths of each fascia board. Take the measurement from the outer edge of the shingle (Figure A). Mark the measurements and make an outline on a graph paper.

Next, mark the locations of the downpipes with a 'X'. (Figure B)

All the repainting for the fascia board should be completed before *Elegance* installation is carried out.

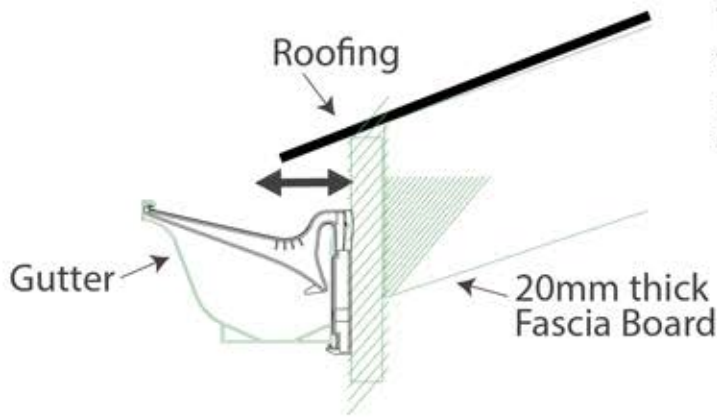

The roof eaves beyond the fascia board should not be less than 50mm or greater than 75mm

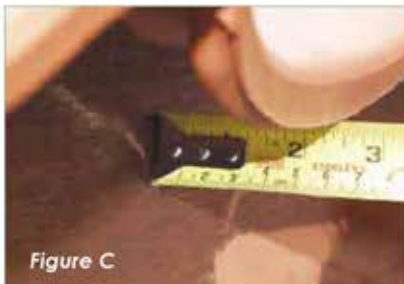


Figure C



Figure E



Figure G



Figure D



Figure F



Figure H

### STEP 3

Drive a nail into the fascia board at one end of the gutter-run (Figure C). The roof eaves beyond the fascia board should be not be less than 50mm or greater than 75mm to ensure correct roof water discharge into the gutter. Stretch a string line from the nail. To properly align the slope (using a line level on the string line) drop one end of the line a quarter-inch for every 10 feet of fascia board length, then mark that point with a pencil (Figure D).

### STEP 4

Determine the lowest point, and attach the expansion outlet to the fascia board by using a power drill (Figure E). Along the gutter run, place the internal brackets at every 600mm interval (Figure F). In order to support the fittings (joiner, internal & external corner, stop end and expansion outlet), internal brackets should be fixed at a distance of 150mm from each end of the fittings.

### STEP 5

Lay gutter profiles and their fittings on the ground as the model for how they will go on the fascia board. Use hacksaw to cut the gutters to the required length (Figure G) and remove all burrs at the cut end. Apply PALING's Solvent Cement to the joining sections and seal those sections accordingly (Figure H). Check the welded sections to ensure that they are completely sealed together. Ensure sufficient solvent cement is used for joining. Wipe off excess solvent cement with a clean cloth immediately.



## INSTALLATION GUIDES

### STEP 6

To apply the gutter profiles to the fascia boards, position the P-shape interlock of the gutter each the bracket ends. After ensuring each bracket is correctly engaged into the P-shape interlock, roll gutter section evenly upwards towards the bracket until the rear top edge firmly locks into the bracket (Figure I). Never solvent weld the gutter with the expansion outlets as the gutter needs to move freely to accommodate thermal expansion (Figure J).



Figure I



Figure J



Figure K

### STEP 7

A series of selection fittings are assembled to divert the rainwater to the drainage system. Install pipe clips at every 1.8m interval along the downpipes (Figure K & L).



B

**PALING's formulated Solvent Cement to be used with Elegance system. The surface areas to be join must be clean and dry before application. Apply solvent cement on both surfaces and join them accordingly. Hold the joining parts together for a minimum of 10 seconds. Check**

The welded surfaces to ensure that a complete seal has been achieved. Excess solvent cement on the exterior surface should be removed immediately.

(No other Solvent Cement should be used without consultation with the manufacturer.)


## APPLICATION SOLUTION

The Elegance expansion joiner is specially designed for addressing substantial movement from thermal expansion/contraction resulting from installation long and straight gutter.

The application is normally suitable for the run of gutter length exceeding 6 metres and without any incorporation of expansion outlet.

It is also intended for gutters running along multiple corners, without thermal movement provision.

Utilizing the expansion joiner in such installation will prevent gutters from warping, bowing and dislocating, resulting in a fairly straight and neat finish.

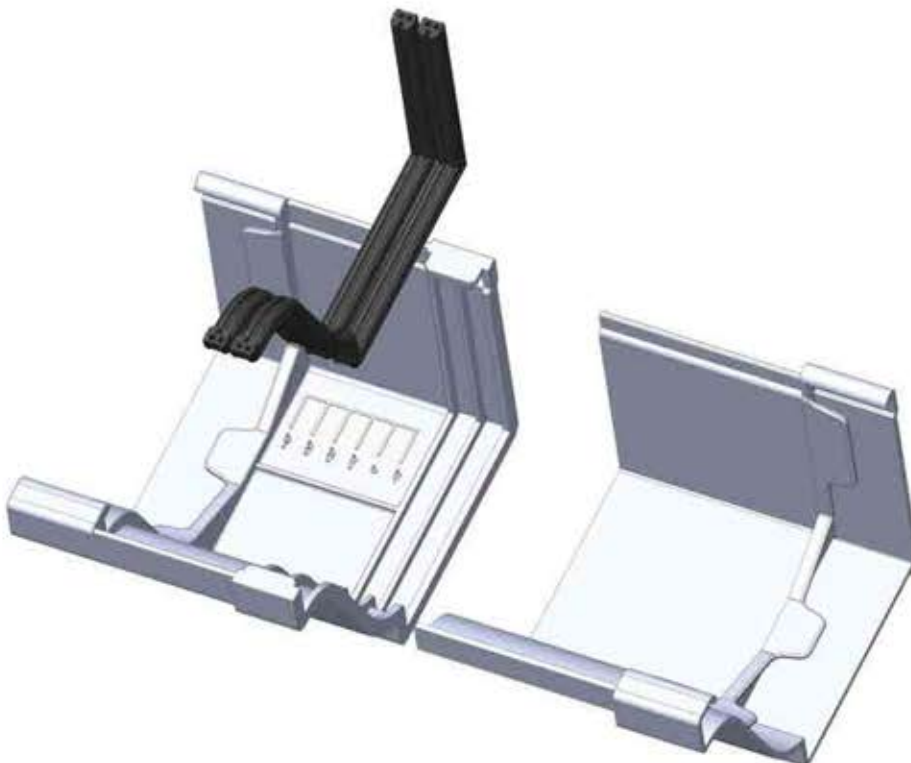



## PROPRIETY FEATURES


The Elegance expansion joiner is equipped with double sliding rubber seal (3), which accommodates and facilitates the movement of the gutters (1), (2).

The dual seal design enhances reliability against leakage during normal or heavy rainfall rate.

Seal material is made of resilient and durable to weathering effect.

The seals inside the expansion joiner can be easily cleaned or replaced, in the event of damage, by removing the 2 parts of the unit (lubricate the gasket with silicon grease after cleaning or replacement before reassembling). The complete unit is pre-lubricated at factory.

The joiner is inherently marked with temperature scale to precisely position gutter according to ambient temperature (range -10°C to 40°C)

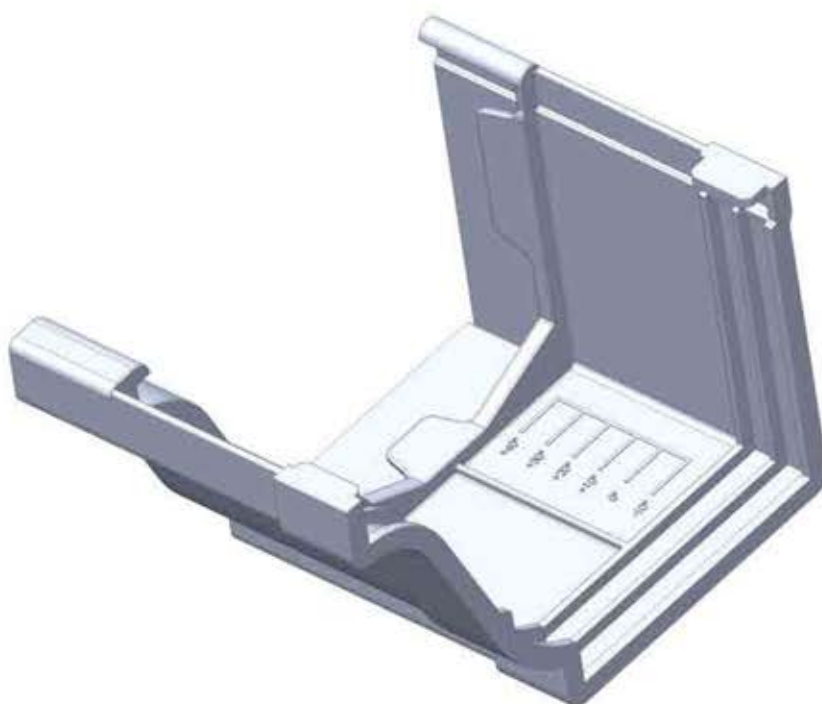


## INSTALLATION

To fix the Elegance expansion joiner is simple and swift. The steps outlined below guides the installation:

- Set bracket spacing at 400mm and place the joiner at mid distance between these brackets.
- Solvent Cement the gutter into one side of the Expansion Joiner and insert into previously installed brackets.
- Set the expansion joiner using the graduated temperature marked on the inside of the base of the fitting according to the temperature at the time of the installation. It is important that the fitting is set in the right position for it to function correctly.
- Determine the length of the next piece of gutter, Solvent Cement this length of gutter into the other side of the expansion joiner, ensuring the joiner is still set at the correct temperature position.

## TECHNICAL DATA

DIMENSIONS (mm)	
L (Open)	190
L (Close)	145
H1	148
H2	130
W	210

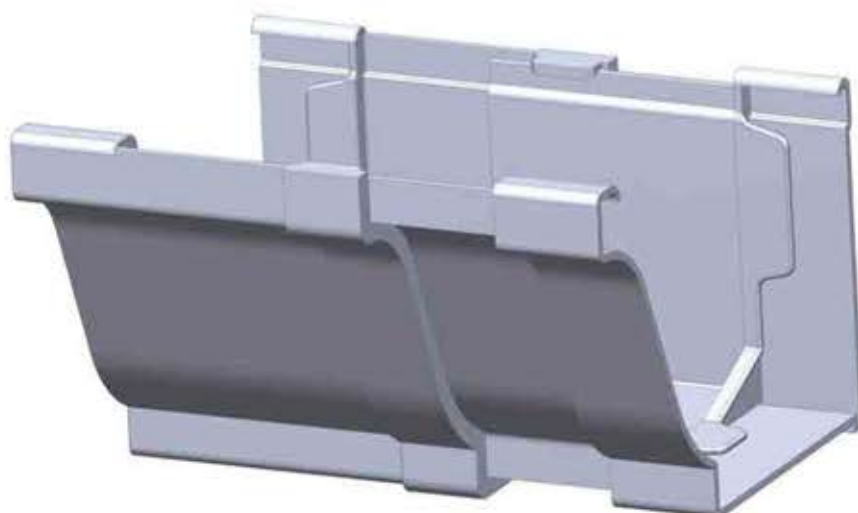

## ASSEMBLY PIPES WITH SOLVENT CEMENT JOINTS

### -1- CUT & DEBURR

Where necessary, cut pipe to length of right angle to its axis to maximize surface for bonding. Use of a mitre box and fine tooth saw is recommended.



Cut surface need to be deburred and chamfered to a slight bevel to simplify centred insertion and uniform adhesive distribution between parts.

### -2- DEGREASE THE SPIGOT AND SOCKET

Mark the insertion depth to the pipe spigot to avoid excessive application and provides control as to whether pipe has been adequately inserted into the fitting.



Clean parts to be fused with priming fluid to ensure that dirt and possible slip and release agents are removed for optimal results. Scrape off any discoloured pipe layer due to UV-radiation or proper bonding cannot be achieved.

### -3- APPLY THE SOLVENT CEMENT

Apply adhesive evenly to both sides to be mated using a brushing stroke parallel to or along the pipe axis. It is recommended that a 1" brush be used to apply the solvent cement



can fin well before using to ensure homogeneity.

for pipes with diameters between 32 to 50mm and 2" brush for pipes with diameters above 50mm. Joint must be made within 2 minutes of starting application.

### -4- MAKE THE JOINT

Insert pipe straight into the fitting as deeply into the fitting socket as possible without twisting and hold in place firmly and steadily for at least ten seconds for Fast Dry and twenty seconds for Slow Dry.

Remove excess solvent cement with a soft cloth. A small closed adhesive ring should be clearly visible at the end of the fitting to signal that the sufficient adhesive has been applied.



### -5- CLEAN THE EXCESS SOLVENT CEMENT

When making multiple joints on a piping system, an undisturbed rest period of at least five minutes is required before second bond can be carried out. This is to avoid stress to the first joint, which may weaken its adhesion.



Wait 24 hours before testing or use



## PROJECT REFERENCES



TAMAN YARL @ SRI PETALING  
MILKY WHITE



LINK HOUSE  
@ KAJANG  
LEATHER BROWN



ADDA HEIGHT  
@ JOHOR  
TRENDY GREY





## ABOUT PALING INDUSTRIES

**PALING INDUSTRIES SDN. BHD. WAS ESTABLISHED IN 1971 TO PRODUCE uPVC PIPES & FITTINGS IN MALAYSIA. OVER THE YEARS IT HAS EXPANDED ITS RANGE TO OTHER SANITARY PRODUCTS AND SYSTEMS LIKE PLASTIC CISTERNS AND OTHER ACCESSORIES.**

These systems are suitable for various applications and building types, including domestic, commercial, industrial and civil construction projects. Our products are accurately designed to consistently exceed the performance aspects specified under widely recognized standards.

Along with ISO 9001 certification and various approvals by SIRIM and IKRAM, Paling products are accredited by NSF, an authority in water industry standards.

Our products are manufactured under an effective system of inspection, testing, supervision and control.

## ABOUT THE ALIAXIS GROUP

**THE ALIAXIS GROUP IS A LEADING GLOBAL MANUFACTURER AND DISTRIBUTOR OF PRIMARY PLASTIC FLUID HANDLING SYSTEMS USED IN RESIDENTIAL AND COMMERCIAL CONSTRUCTION.**



Aliaxis is present in more than 40 countries. The Group has more than 100 manufacturing and commercial entities and employs over 14,600 people.

The ethos of the Group allows local and global knowledge of the industry, regulations and building practices to combine and provide consistently excellent customer service to specifiers, consultants, contractors, installers and others.

### IN ASIA

**Malaysia:**  
Kuala Lumpur

**Vietnam:**  
Ho Chi Minh

**India:**  
Bangalore,  
Mumbai & Goa



**Singapore**

**China:**  
Beijing,  
Shanghai &  
Guangzhou



NOTE :

: DATE

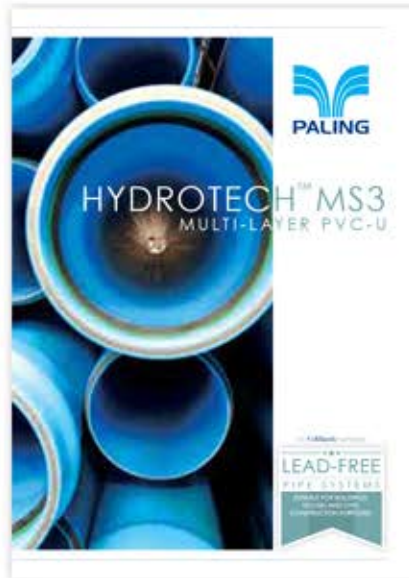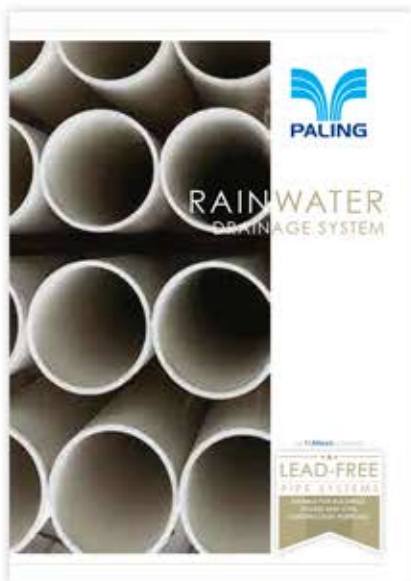

#### Disclaimer

This brochure has been compiled by Paling Industries Sdn Bhd ("the company") to promote better understanding of the technical aspects of the Company's products to assist users in obtaining from them the best possible performance. The brochure is supplied subject to acknowledgment of the following conditions:

- i) The brochure is protected by Copyright and may not be copied or reproduced in any form or by any means in whole or in part without prior consent in writing by the Company.
- ii) Product specifications, usage data and advisory information may change from time to time with advances in research and field experience. The Company reserves the right to make such changes at any time without notice.
- iii) Correct usage of the Company's products involve engineering judgements which cannot be properly made without full knowledge of all the conditions pertaining to each specific installation. The Company expressly disclaims all and any liability to any person done by any such person in reliance whether whole or partial upon the whole or any part of the contents of this brochure.
- iv) No offer to trade, nor any conditions of trading, are expressed or implied by the issue or content of this brochure.
- v) Nothing herein shall override the Company's conditions of Sale, which may be obtained from the Registered Office or any Sales Office of the Company.
- vi) This brochure is and shall remain the property of the Company, and shall be surrendered on demand to the Company.



TRUSTED PIPEWORK FOR LIFE

PALING INDUSTRIES SDN BHD (11039 V)

Distributed by :

